


Load Data




span (ft)	Uniform Loads			Center Pt. Load	
	load (plf)	load (lbs)	defl (in)	load (lbs)	defl (in)
4	413	1651	0.10	1651	0.10
8	205	1640	0.50	1129	0.50
12	110	1315	1.30	657	1.00
16	33	525	1.30	262	1.00
20	12	237	1.30	118	1.10
24	4	104	1.30	52	1.10

Component Weights


Part No	Description	WT (lbs)
NWA10	10ft Section	12
NWA9	9ft Section	11
NWA8	8ft Section	10
NWA7	7ft Section	9
NWA6	6ft Section	8
NWA5	5ft Section	7
NWA4	4ft Section	6
NWA3	3ft Section	5
NWA2	2ft Section	4
NWA3M	3m Section	12
NWA2.5M	2.5m Section	10
NWA2M	2m Section	8
NWA1.5M	1.5m Section	7
NWA1M	1m Section	5
NWA0.5M	0.5m Section	4



Dimensions

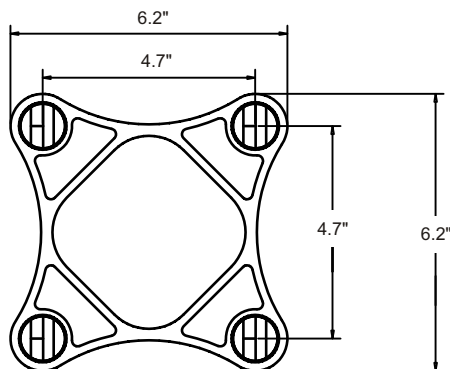

3d view

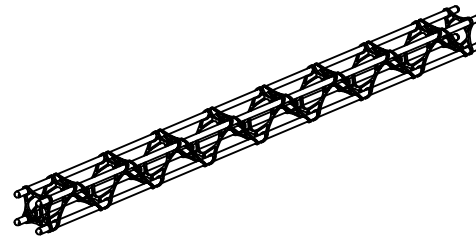

Truss Features

Description	Specification
External Dimensions	6"w. x 6"h.
Connection Centers	5"w. x 5"h.
Material Type	Aluminum (Various alloys)
Connector Type	new wave OMNI connectors
Maximum Certified Span	20ft