


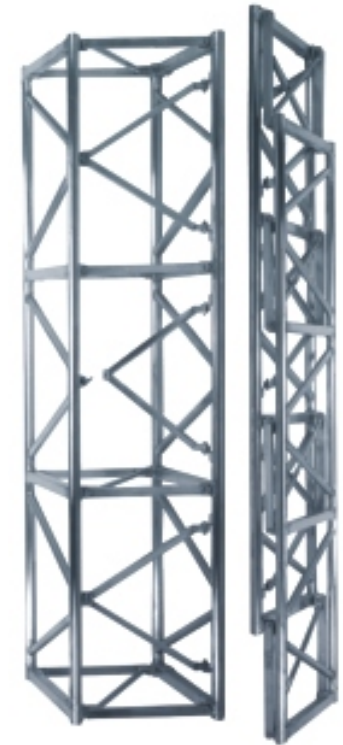
### Load Data




span (ft)	Uniform Loads			Center Pt. Load		Third Pt. Load		Quarter Pt. Load	
	load (plf)	load (lbs)	defl (in)	load (lbs)	defl (in)	load (lbs)	defl (in)	load (lbs)	defl (in)
10	827	8272	0.03	2418	0.01	1209	0.01	1531	0.02
15	548	8223	0.10	2370	0.05	1185	0.04	1515	0.07
20	409	8174	0.23	2321	0.11	1160	0.09	1499	0.16
25	325	8126	0.46	2272	0.21	1136	0.18	1482	0.32
30	269	8077	0.79	2223	0.36	1111	0.31	1466	0.55
35	197	6885	1.08	2174	0.57	1087	0.49	1450	0.87
40	148	5933	1.41	2125	0.84	1063	0.73	1434	1.30
45	115	5181	1.78	2076	1.19	1038	1.04	1295	1.70
50	91	4570	2.20	2027	1.62	1014	1.41	1143	2.10
55	74	4062	2.66	1979	2.14	989	1.87	1015	2.54
60	60	3629	3.17	1815	2.62	965	2.42	907	3.03

### Component Weights


Part No	Description	WT (lbs)
HFFT3M	3m section including 4 off turnbuckle connectors	123
HFFT2M	2m section including 4 off turnbuckle connectors	87
HFFT1M	1m section including 4 off turnbuckle connectors	62
HFFTC4	4 way corner section including 8 off turnbuckle connectors	90
HFFTS4N	4 way sleeve section	98



### Dimensions

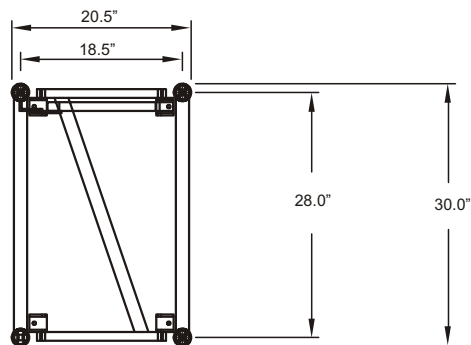

### 3d view

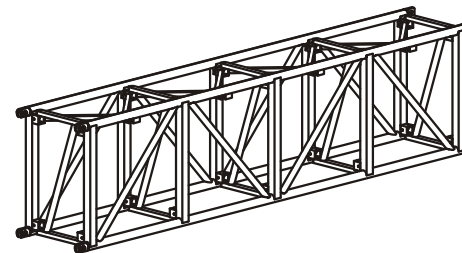

### Truss Features

#### Description

- External Dimensions
- Connection Centers
- Material Type
- Connector Type
- Maximum Certified Span

#### Specification

- 20-1/2" w. x 30"h.
- 18-1/2" w. x 28"h.
- 6061-T6 Aluminum
- Aluminum Fork
- 60ft